

ALTAIR[®] 4X

IT'S WHAT'S INSIDE THAT COUNTS

ALTAIR 4X Multigas Detector
With MSA XCell™ Sensor Technology



MSA
The Safety Company



■ MSA-exclusive feature

IT'S WHAT'S INSIDE THAT COUNTS

OUR VISION OF SAFETY Workers who face potentially dangerous situations deserve the best protection available. At MSA, we work tirelessly to build smarter, better gas detection instruments that people across the world can rely on. To that end, we're proud to introduce the most advanced technology available in any portable gas detector on the market: **the ALTAIR 4X Multigas Detector with XCell Sensor Technology.**

Built on Durability

The ALTAIR 4X Multigas Detector for LEL, CO, H2S and O2 is as tough and functional as it looks. A rugged housing provides unsurpassed durability, including the ability to survive a 20-foot drop. And with large, glove-friendly buttons and a high-contrast display, the ALTAIR 4X Multigas Detector is easy to operate in any work environment, even low-light conditions.

Powered by Performance

Toughness and durability aren't the whole story. The real strength of the ALTAIR 4X Multigas Detector comes from new sensor technology. MSA XCell Sensors have a typical life of more than four years, double the industry average, and are engineered using MSA's proprietary application-specific integrated circuit (ASIC) design. By miniaturizing the sensors' controlling electronics and placing them inside the sensor itself, MSA XCell Sensors offer superior stability, accuracy and repeatability.

MSA XCell Sensors are a breakthrough in chemical and mechanical sensor design, enabling faster response and span calibration times. With less time spent on calibration and bump tests, you save calibration gas, maintenance costs and, in turn, save money. But most importantly, in your industry, saving seconds on response time can also mean saving lives.

Count on the ALTAIR 4X Detector

Exclusive safety features like MotionAlert™ and InstantAlert™ make the ALTAIR 4X Multigas Detector ideal for applications like confined space entry. The MotionAlert sensor activates when a user becomes disabled and motionless, quickly alerting others to the disabled user's location. And with a simple push of a button, the InstantAlert feature enables users to manually alert others to potentially hazardous situations.

The ALTAIR 4X Multigas Detector outlasts the competition. To prove it, the instrument comes with a full three-year warranty, an entire year longer than the industry average, so you can depend on the ALTAIR 4X Multigas Detector to withstand the wear and tear that other portable gas detectors can't.


XCell™

SENSORS

MSA XCell
Combustible Sensor

MSA XCell
CO/H₂S Sensor

MSA XCell
Oxygen Sensor

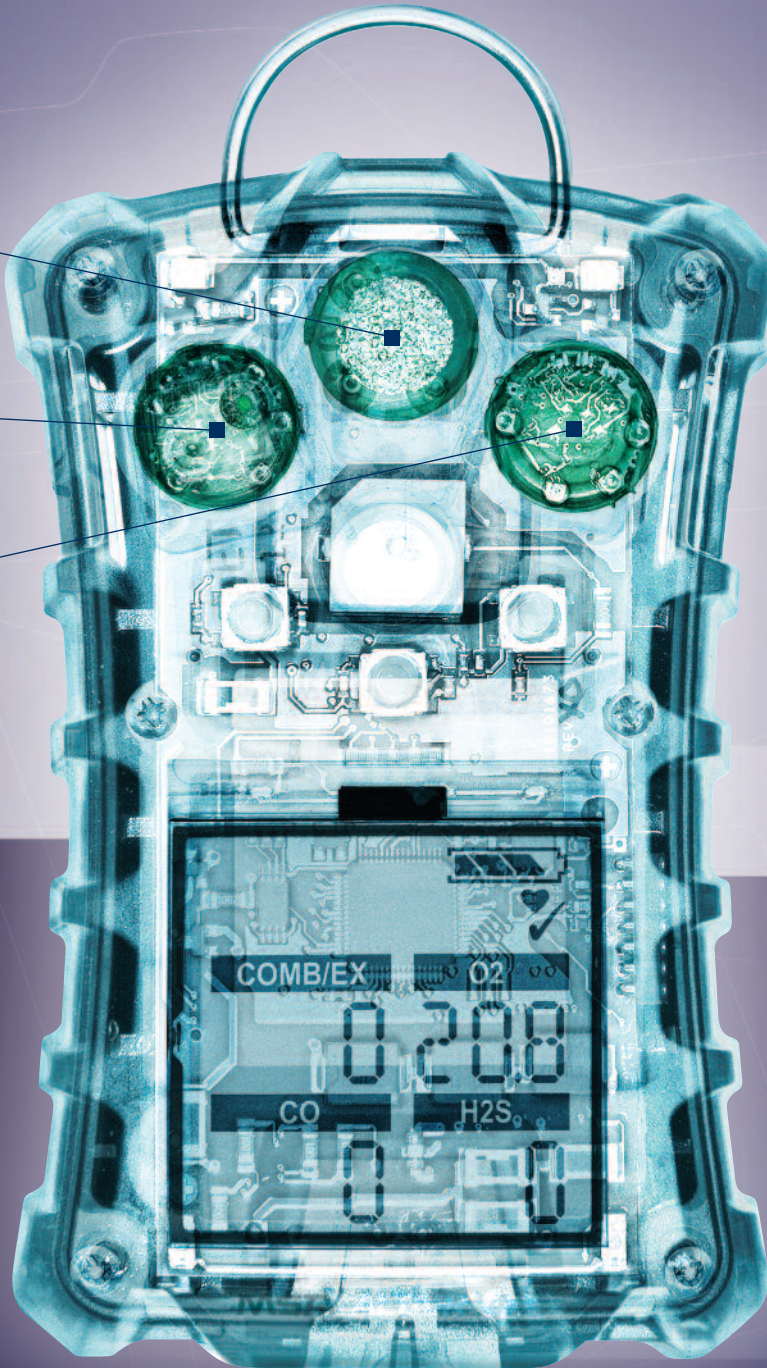

Adding microelectronics inside the sensors provides more control and higher performance than previous generations



MSA XCell Sensors are a breakthrough in chemical and mechanical sensor design, enabling faster response and span calibration times

THE MSA COMMITMENT FROM THE LATEST IN SENSOR TECHNOLOGY TO INSTRUMENT DESIGN AND MANUFACTURING, MSA HAS THE CAPABILITIES AND KNOWLEDGE TO SUPPORT YOUR PORTABLE GAS DETECTION CHALLENGES.

MSA XCell Technology:

Save Time, Save Money, Save Lives

Building on years of sensor design experience, MSA is revolutionizing sensor technology with breakthroughs in design that improve performance.

- Sensor response and clear times under 15 seconds
- Bump test under 15 seconds
- Span calibration time of 60 seconds
- Greater signal stability and repeatability under changing or extreme environmental conditions
- Two-tox CO/H2S sensor with virtually no cross-channel interference
- The digital output of the sensors makes them much less susceptible to RF interference

With reliable, extended-life XCell Sensors, there's no need to replace sensors after two years.

- Typical life greater than four years
- Laser-welded sensor housings eliminate opportunities for leaks
- Proprietary operating mode of the combustible sensor helps it stand up to poisons over the life of the sensor
- End-of-sensor-life warning gives advanced notice to user, reducing service outages

Technology That's Tough

Life-Saving Performance

- Large buttons and a bright display enable quick and easy operation even while wearing gloves
- If a user becomes disabled due to unforeseen hazards, the MotionAlert sensor will activate after 30 seconds
- The InstantAlert feature enables users to manually alert others of a dangerous situation with the push of a button
- Compatible with Galaxy[™] Test System and ALTAIR 4 QuickCheck[®] Station
- MSA Link[™] Software-ready
- Global approvals for worldwide acceptance

Lasting Durability

- Full three-year warranty supports the entire instrument, including the sensors and battery
- Withstands extreme impacts with rugged polycarbonate housing
- Passes 20-foot drop test
- The IP67-rated Altair 4X is both dust tight and water tight

Applications

- Oil, gas and petrochemical • Pharmaceutical • Chemical • Confined spaces • Fire service
- Utilities and telecommunications • Municipal works, waste water • Mining



New glow-in-the-dark housing for mining or confined spaces applications

MSA

Technical Specifications

Gas	Range	Resolution
LEL	0-100%	1%
O ₂	0-30% vol	0.1% vol
CO	0-1999 ppm	1 ppm
H ₂ S	0-200 ppm	1 ppm

Drop test 20 feet
Housing Rugged rubberized armor

Weight 7.9 oz
Dimensions (L x W x D) 4.4 x 3.0 x 1.31

Audible alarm >95 dB at 1 ft

Visual alarm 4 ultra-bright LEDs on top and bottom

Vibrating alarm Standard

MotionAlert & InstantAlert Optional

Display High Contrast LCD

Backlight Adjustable time-out

Battery Rechargeable

li-polymer

Run time 24 hours
 @ room temperature

Charging time < 4 hrs

Operating temperature range -20°C to + 50°C

Short Period Operation -40 °C to + 60 °C

Humidity 15 – 90% RH
 non-condensing

Ingress protection IP67

Data log (Adjustable)

Event log 50 hour minimum
 Standard 500 events

Standard warranty 3 years

Extended warranty Optional 1 year

ALTAIR 4X Detector with 3-year warranty, data logging, charger, calibration cap and tubing

Approvals

U.S./CAN	ATEX	ANZ	Configuration	Case Color
10107602	10110453	10110447	LEL, O ₂ , CO, H ₂ S	Charcoal
10107603	10110456	10110450	LEL, O ₂ , CO, H ₂ S	Phosphorescent
10110443	10110454	10110448	LEL, O ₂ , CO	Charcoal
10110445	10110457	10110451	LEL, O ₂ , CO	Phosphorescent
10110444	10110455	10110449	LEL, O ₂	Charcoal
10110446	10110458	10110452	LEL, O ₂	Phosphorescent

ALTAIR 4X Four-gas Detector in black case with calibration cylinder and 0.25 lpm regulator

U.S./CAN Approval	Configuration	Case Color
10110488	LEL, O ₂ , CO, H ₂ S	Charcoal
10110489	LEL, O ₂ , CO, H ₂ S with Universal Pump Probe	Charcoal

Altair 4 Galaxy Automated Test System

Power Supply

North America	Global	Configuration
10089998	10090001	Standard System
10089996	10090000	Standard System with Charging and Cylinder Holder
10089969	10089970	Smart System (memory card)
10089967	10089966	Smart System (memory card) with Charging and Cylinder Holder

Calibration Gas

10048280	Gas can (34 l) 1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S
10045035	Gas can (54 l) 1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S

Replacement sensors

10106722	XCell Ex Combustible sensor
10106729	XCell O ₂ sensor
10106725	XCell CO/H ₂ S Two-tox sensor
10106724	XCell CO sensor
10106723	XCell H ₂ S sensor

Accessories

10055576	Universal pump probe (U.S./CAN)
10047594	Universal pump probe (ANZ/IEC)
10047596	Universal pump probe (ATEX)

Approvals (pending)

United States

ETL Class I, Div. 1, Groups A,B,
 C&D Tamb=-40°C to +54°C
 ETL Class II, Div.1, Groups E,F&G
 Class III, Div. 1 Tamb=-40°C to +54°C; T4

Canada

CSA Class I, Div. 1, Groups A,B,C&D
 CAN/CSA C22.2 152; 12.13.01-2000
 ETL Class II, Div.1, Groups E,F&G
 Class III, Div. 1 Tamb=-40°C to +54°C; T4

Offices and representatives worldwide

For further information:

ATEX

II 1G Ex ia IIC T4, -40°C to +60°C, IP67
 (Zone 0 with no combustible sensor installed)
 II 2G Ex ia d IIC T4, -40°C to +60°C, IP67
 (Zone 1 with combustible sensor installed)

IEC

Ex ia IIC T4, -40°C to +60°C
 (Zone 0 with no combustible sensor installed)
 Ex ia d IIC T4, -40°C to +60°C
 (Zone 1 with combustible sensor installed)

Australia / New Zealand

Ex ia s IIC T4, -40°C to +60°C, IP67 (Zone 0)

For additional customized versions and calibration gases, use MSA's ATO ordering sheet or contact MSA Customer Service at 1-800-MSA-2222.

Note: This bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 0802-50-MC / Oct 2010

© MSA 2010 Printed in U.S.A.

Corporate Headquarters
 P.O. Box 426, Pittsburgh, PA 15230 USA
 Phone 412-967-3000
www.MSAnet.com

U.S. Customer Service Center
 Phone 1-800-MSA-2222
 Fax 1-800-967-0398

MSA Canada
 Phone 1-800-672-2222
 Fax 1-800-967-0398

MSA Mexico
 Phone 01 800 672 7222
 Fax 52-44 2227 3943

MSA International
 Phone 412-967-3354
 FAX 412-967-3451

